

RTX64 3.0

Overview

RTX64 is a key component of the IntervalZero RTOS Platform that also includes x86 and x64 multi-core multiprocessors, and the Windows operating system to outperform real-time hardware such as DSPs and MCUs and reduce the development costs for systems that require determinism or hard real-time.

Symmetric multiprocessing-enabled RTX64 takes full advantage of 64-bit memory and performance capabilities. Uniquely, the RTX64 RTOS scheduler enables embedded real-time applications to directly access the 512GB of addressable physical memory available on 64-bit Windows.

This is critical to modern day real-time systems and represents a gigantic leap from the 4GB physical memory limit of traditional 32-bit Windows systems. The 4GB barrier has stymied innovation in many industries that depend on real-time systems and that require memory access far beyond 4GB.

Determinism

- Guaranteed Precision – set timer periods down to 1 microsecond, and Interrupt Service Thread (IST) latencies of less than 10 microseconds
- Separation from Windows – Windows processes cannot interfere with real-time applications
- Scalability – one scheduler is used across all real-time processors. Symmetric multiprocessing (SMP) aware scheduler utilizes both priority-driven and pre-emptive algorithms to ensure critical thread context switches; and yields to threads of high priority occur in the sub-microsecond range

Control

- Flexibility to configure how much or little processing capability is used for real-time processes (1 to 63 processors)
- Full control of real-time process threads with the ability to load balance as needed. RTX64 provides the ability to set thread and interrupt affinities.
- Peace of mind if Windows issues a STOP message or shutdown; real-time applications have the ability to continue running to safety shutdown

Simplify

- Use a single operating system for applications. RTX64 is supported on Windows 7 SP1, Windows Embedded Standard 7 SP1, Windows 8.1, Windows Embedded Standard 8.1, and Windows 10
- Use commercial off-the-shelf (COTS) target system; no special hardware required
- Use one development environment - Visual studio 2012, 2013, and 2015
- Use common languages (C/C++) for Windows and real-time applications
- Use common Win32 API; same code can be run as a Windows or real-time process
- Use managed code for Windows application and still communicate with your real-time applications
- No driver model to follow; real-time process can talk directly to hardware
- Use standard IPC communication between Windows applications and real-time processes (events, mutexes, and semaphores)
- Use shared memory between Windows and real-time process for sharing of data


Reduce Costs

- Eliminate additional system to perform the HMI
- Eliminate proprietary controller and communications cards
- Improved asset utilization: Take advantage of underused multi-core capacity
- Reduced manufacturing costs and fewer physical parts

Improve Efficiency

- Eliminate some inventory costs and reduce maintenance costs
- Field upgrades are accomplished through software download rather than board replacement

Architecture

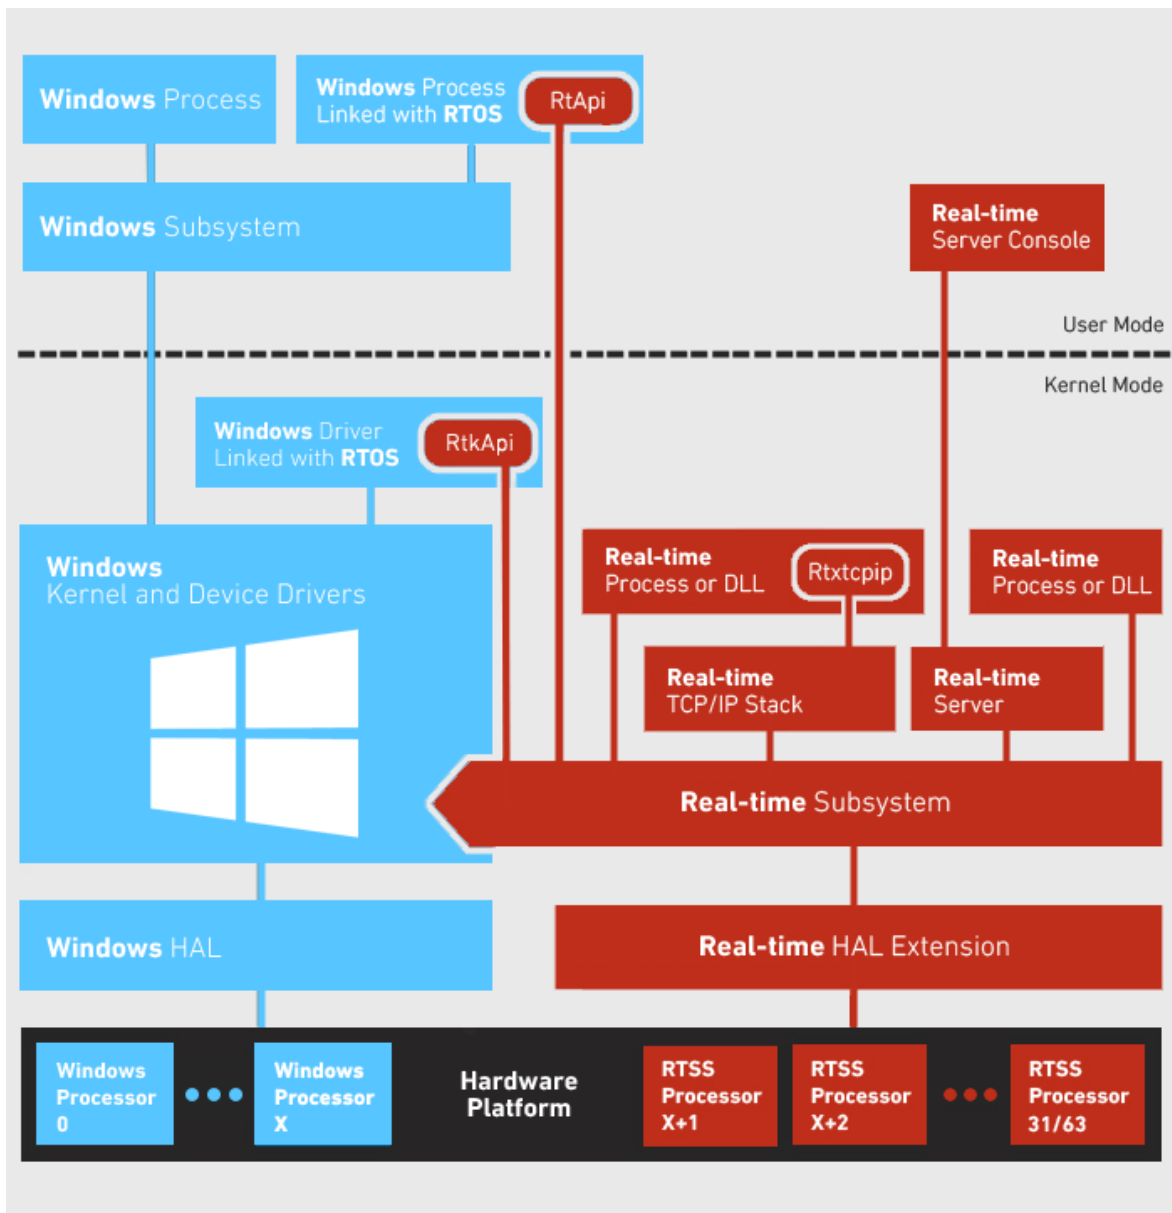

Key Features

Real-time Runtime

- Scalable from 1 to 63 real-time processors
- SMP aware scheduler utilizes both priority-driven and pre-emptive algorithms to ensure critical thread context switches; and yields to threads of high priority occur in the sub-microsecond range
- Configurable thread and interrupt affinity
- Configurable timer period
- Ability to attach to line-based and message-based (MSI/MSI-X) interrupts
- Shutdown handling on Windows STOP or shutdown
- Deterministic memory
- Access to Windows file system and registry
- Ability to set Search paths for process creation and loading of RTDLLs
- Dynamic-link library support through RTDLLs, which can be loaded implicitly or explicitly
- Ability to profile application behavior by monitoring internal objects and custom events
- Real-time Inter Process Communication between Windows user processes and real-time processes
 - Native and managed interface for 32-bit or 64-bit Windows processes
 - Objects available: events, mutexes, and semaphore
 - Data sharing through shared memory
- Real-time Inter Process Communication between Windows kernel drivers and real-time processes
 - Native interface for 64-bit Windows drivers
 - Objects available: events, mutexes, and semaphore
 - Data sharing through shared memory
- Windows user groups for limiting access to RTX64 features
- Tools and Utilities
 - Activation and Configuration - activate subsystem components and configure RTSS cores
 - Control Panel – configuration the subsystem
 - Server Console – display print messages
 - SRTM – view system timer to timer handler response on a given core
 - KSRTM – view system timer to interrupt service routine (ISR) response
 - Latency View – view and compare system timer response latencies on multiple cores at the same time
 - Task Manager – display a list of running RTSS processes and Windows processes and drivers linked to RTX64
 - Monitor – configures profiling of RTSS
 - RTX64CPUUsage – view total CPU usages on RTSS cores
 - RTX64Objects – view internal objects and states

Software Development Kit

- Headers and libraries for application development
 - Real-time API (RTAPI) similar to Windows Win32 API
 - Real-time kernel API (RTKAPI)
 - Real-time Network API (RTNAPI)

- Real-time Network Driver API (RTNDAPI)
- Managed Code Interface (IntervalZero.RTX64)
- Microsoft Visual Studio 2012, 2013, and 2015 support
 - Wizard for application and dll development
 - API Code snippets
 - Microsoft Visual Studio C-Runtime support
 - Local and remote debugger support via launch within Visual Studio
- Microsoft WinDbg extension and RTSS symbols
- Percepio Tracealyzer for RTX64 – graphical tool to analyze monitoring data
- Sample source to show basic concepts

Product Documentation

- Documentation consisting of installation and user guides, API references, and details on real-time programming concepts

Additional Purchasable Features

- RT-TCP/IP Stack provides the following networking capabilities to the RTX64 Subsystem:
 - TCP/UDP/IP networking for RTX64 processes
 - Support for IPv4 and IPv6
 - Winsock support
 - RAW Sockets
 - MAC layer filtering
 - Virtual Network – point to point connection between Windows and RTSS
 - RT-TCP/IP network drivers for a number of common Network Interface Cards
 - Utilities (RtssArp, RtsslConfig, RtssPing, and RtssRoute)

